



5210/5710 in polar white



White with carriage house plain windows



5270/5770 in polar white with ranch prairie windows

Panel Options



Flush Stucco Panel

Model 5210 (2" thick)
Model 5710 (1 3/4" thick)
Carriage Windows p25 & 27
Ranch Windows p26 & 27
TL Windows p26
Standard Windows p24 & 27
SlimLine Windows p26



V-Groove Stucco Panel

Model 5212 (2" thick)
Model 5712 (1 3/4" thick)
Carriage Windows p25 & 27
TL Windows p26
SlimLine Windows p26



Raised Ranch Stucco Panel

Model 5270 (2" thick)
Model 5770 (1 3/4" thick)
Ranch Windows p26 & 27
Model 5267 ◇ (2" thick)
Model 5767 ◇ (1 3/4" thick)
Carriage Windows p25 & 27
Model 5287 ◇ (2" thick)
Model 5787 ◇ (1 3/4" thick)
Standard Windows p24 & 27



Raised Standard Stucco Panel

Model 5280 (2" thick)
Model 5780 (1 3/4" thick)
Standard Windows p24 & 27
Model 5268 ◇ (2" thick)
Model 5768 ◇ (1 3/4" thick)
Carriage Windows p25 & 27
Model 5278 ◇ (2" thick)
Model 5778 ◇ (1 3/4" thick)
Ranch Windows p26 & 27

◇ = Due to variances in window sizes, not all window and panel stamp configurations align.

FEATURES

- 2" or 1¾" Thick with Full Thermal Break
- 0.110 Tested U-Factor (5200 Models); 0.097 Tested U-Factor (5700 Models)
- Environmentally Compliant Polyurethane Insulation
- Corrosion-Resistant Stucco Embossed Aluminum
- Air Infiltration Joint Seal (5200 Models)
- Check with dealer for available Wind Load & Impact Options
- Decorative Glass Options (pg 27)
- SelectView Options (pg 22-23)
- 37 Window Options (pg 24-27)
- • Industry Leading Warranty (pg 30)
 - Lifetime Delamination
 - Finish Warranty (pg 30)
 - 6 Year Hardware
 - 3 Year Spring
 - 1 Year All Other Components



MIAMI-DADE COUNTY
APPROVED




Florida/Non-Florida
Wind Load
Impact/Non-Impact



Texas/Non-Texas
Wind Load
Impact/Non-Impact


LIMITED
LIFETIME
WARRANTY



5200


A **Full Thermal Break** is used in the tongue-and-groove construction of all 5000 series doors. This rigid vinyl extrusion seals the joints and eliminates metal-to-metal contact, which limits the transfer of temperature.

5200 series doors include **Air Infiltration Seals**, which exceed the ASHRAE 90.1 Standard when installed with standard bottom seal and commonly available rigid/flexible vinyl door stop.



5700

Color Option

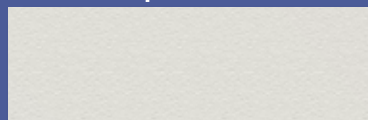

Polar White

Insulated Aluminum